CLEAR FORM

CUSTOMER | Cust. Approval

CUSTOMER PART # | Work Order #

FLEX-CABLE CODE #

SHUNT ORDER FORM

FLEX-CABLE

1 SHUNT TYPE

PLEASE MARK TYPE (ONE ONLY)

☐ C/J



☐ S/F



☐ L



☐ Special (See Print)

PRINT #

2 DIMENSIONS

☐ inch ☐ mm

ENTER DIM. AFTER EACH FIGURE

THICKNESS



WIDTH



OUTSIDE LENGTH



INSIDE LENGTH (OPTIONAL)



BLOUSING THICKNESS WILL BE APPROX. 1.5 X T IF INSIDE LENGTH IS NOT SPECIFIED

3 HOLE SPECIFICATIONS

MARK HOLE PATTERN (ONE FOR EACH END)

END 1 | END 2

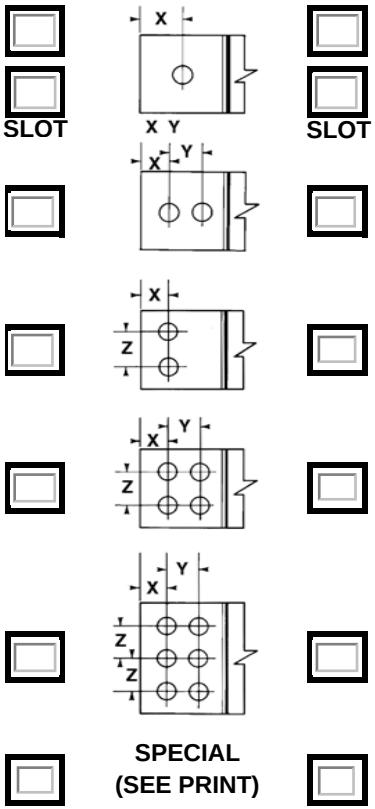

HOLE DIMENSIONS SEE FIG. ABOVE

	END 1	END 2
X =		= X
Y =		=Y
Z =		= Z

HOLE / SLOT SIZE

END 1	END 2

4 END TREATMENT

CHECK END TREATMENT (ONE FOR EACH END)

END 1 | END 2

☐ FUSED / BONDED (default)

☐ PLATE

☐ LOOSE

☐ OTHER (SEE PRINT)

5 PLATE INFORMATION



PLATE DIMS (BLANK FOR NONE)

O=	=O
I=	=I

PLATE THICKNESS

DEFAULT IS 1/16"

○ 1/16" 1.6mm ○ 1/8" 3.2mm

○ 3/16" 4.8mm ◉ 1/4" 6.4mm

MARK YES FOR FLARING

FLARE IS 1/4" AT 45° (6mm)

END 1	END 2
INSIDE FLARE	
☐ YES	YES ☐
OUTSIDE FLARE	
☐ YES	YES ☐

☐ SPECIAL FLARE (PRINT)

6 OPTIONS / FINISHING

MATERIAL THICKNESS (REQUIRED)

○ 0.003 ○ 0.005 ○ 0.010

.005 is default for shunts less than 2" wide.

.010 is default for shunts greater than

1/2-HARD TIN COATED C-110 IS DEFAULT FOR ALL SHUNTS

MARK YES FOR SILVER PLATING

END 1	END 2
INSIDE SILVER PLATING	
☐ YES	YES ☐
OUTSIDE SILVER PLATING	
☐ YES	YES ☐

MARK COATING (OPTIONAL)

FIBERGLASS SHIELD	
☐ INSIDE	OUTSIDE ☐
TEFLON TAPE	
☐ INSIDE	OUTSIDE ☐

Comments

Phone (231) 937-8000 Fax (231) 937-8091 email sales@flexcable.com www.flexcable.com

CLEAR FORM