




FLEX-CABLE

THERMA-GUARD

Sensor Cable Replacement

Weld Flash and high heat conditions taking a toll on your cables? Flex-Cable's Therma-Guard Sensor Replacement Cable is the answer to shortened sensor cable life due to severe environment issues.

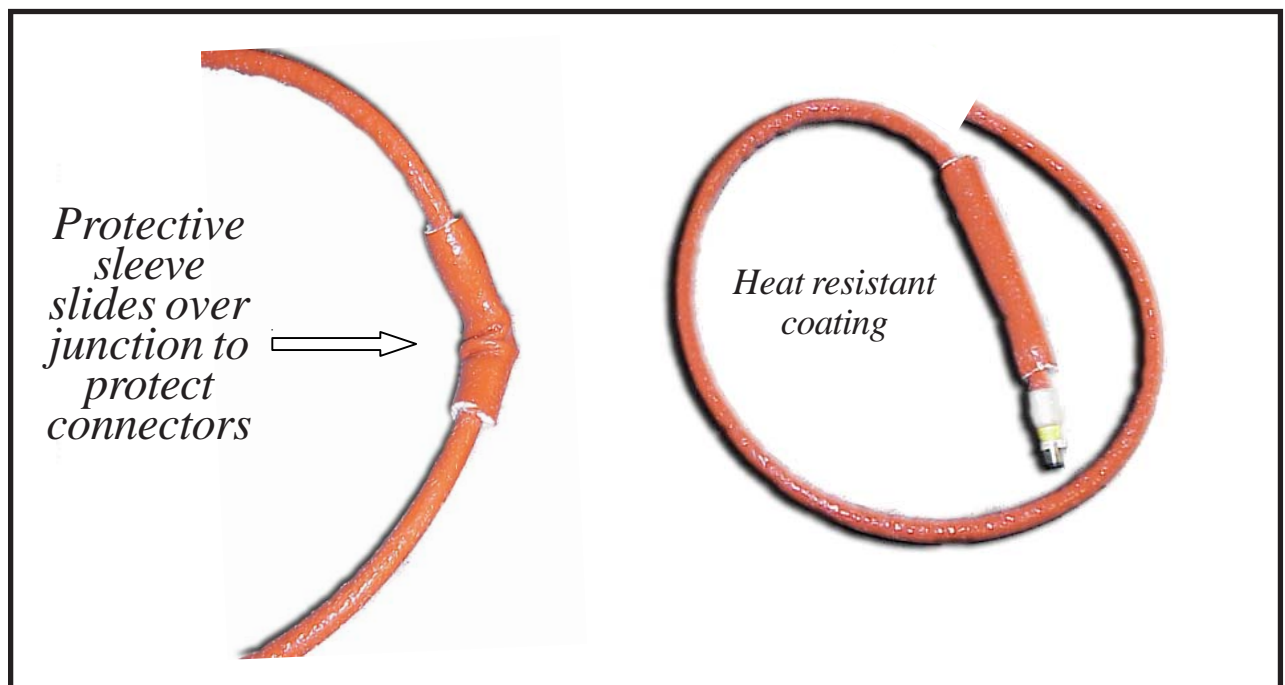

- Made with an aircraft grade, silicone-coated, fiberglass weave
- Operating temperature of over 500°F
- Short-term exposure threshold of 2000°F

www.flexcable.com



MINI Series Size I Cordsets

*PVC Cable * 18 AWG *
* 300V Plugs *

Face View of Female	# of Poles	Color Code	Wire AWG Rating	Length	Female Plugs Straight	Male Plugs Straight
	3	1-Green/Yellow 2-Black 3-White	18 300V 10A	3 FT 6 FT 12 FT 20 FT 30 FT 50 FT	MIN-3FPX-3TF MIN-3FPX-6TF MIN-3FPX-12TF MIN-3FPX-20TF MIN-3FPX-30TF MIN-3FPX-50TF	MIN-3MPX-3TF MIN-3MPX-6TF MIN-3MPX-12TF MIN-3MPX-20TF MIN-3MPX-30TF
	5	1-White 2-Red 3-Green/Yellow 4-Orange 5-Black	18 300V 5.5A	3 FT 6 FT 12 FT 20 FT 30 FT 50 FT	MIN-5FPX-3TF MIN-5FPX-6TF MIN-5FPX-12TF MIN-5FPX-20TF MIN-5FPX-30TF MIN-5FPX-50TF	MIN-5MPX-3TF MIN-5MPX-6TF MIN-5MPX-12TF MIN-5MPX-20TF MIN-5MPX-30TF
	6	1-White 2-Red 3-Green/Yellow 4-Orange 5-Black 6-Blue	18 300V 5.5A	3 FT 6 FT 12 FT 20 FT 30 FT	MIN-6FPX-3TF MIN-6FPX-6TF MIN-6FPX-12TF MIN-6FPX-20TF MIN-6FPX-30TF	MIN-6MPX-3TF MIN-6MPX-6TF MIN-6MPX-12TF MIN-6MPX-20TF MIN-6MPX-30TF

Specifications:

Body: Oil Resistant Yellow PVC
 Contacts: Copper Alloy with Gold Plating
 Cable: Oil Resistance Yellow PVC Jacket,
 Rated at 300V, 105°C, Non-Wicking,
 Non-Hygroscopic, AWM Style 2661 or 2517
 Conductors: 18 AWG Bare Copper, PVC Insulated
 Temperature: -40°F to 500°F
 Protection: IP 67
 Approvals U.S.: UL Recognized
 Canada: C-UL Recognized

MICRO-DC Series

M12 Cordsets

*PVC Cable * 18 AWG *
* 300V Plugs *

Face View of Female	# of Poles	Color Code	Wire AWG Rating	Length	Female Straight	Male Straight
	3	1-Brown 2-Not Used 3-Blue 4-Black	18 300V 4A	1 m 2 m 4 m 5 m 10 m	MDC-3FPX-1MTF MDC-3FPX-2MTF MDC-3FPX-4MTF MDC-3FPX-5MTF MDC-3FPX-10MTF	MDC-3MPX-1MTF MDC-3MPX-2MTF MDC-3MPX-4MTF MDC-3MPX-5MTF MDC-3MPX-10MTF
	4	1-Brown 2-White 3-Blue 4-Black	18 300V 4A	1 m 2 m 4 m 5 m 10 m	MDC-4FPX-1MTF MDC-4FPX-2MTF MDC-4FPX-4MTF MDC-4FPX-5MTF MDC-4FPX-10MTF	MDC-4MPX-1MTF MDC-4MPX-2MTF MDC-4MPX-4MTF MDC-4MPX-5MTF MDC-4MPX-10MTF
	5	1-Brown 2-White 3-Blue 4-Black 5-Gray	18 300V 4A	1 m 2 m 4 m 5 m 10 m	MDC-5FPX-1MTF MDC-5FPX-2MTF MDC-5FPX-4MTF MDC-5FPX-5MTF MDC-5FPX-10MTF	MDC-5MPX-1MTF MDC-5MPX-2MTF MDC-5MPX-4MTF MDC-5MPX-5MTF MDC-5MPX-10MTF